

Industrial Ethernet Switches

System Level • 12/24-Port




NL30



NL31



NL33

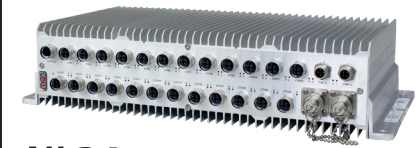

NL34

Channels

12 × 1000BASE-TX
 Option: 2x 1000BASE-SX
 fiber uplink (Q-ODC)

12 × 1000BASE-TX
 Option: 2x 1000BASE-SX
 fiber uplink (Q-ODC)

24 × 1000BASE-TX
 Option: 2x 1000BASE-SX
 fiber uplink (Q-ODC)

24 × 1000BASE-TX
 Option: 2x 1000BASE-SX
 fiber uplink (Q-ODC)

Management

Fully Managed

Fully Managed

Fully Managed

Fully Managed

Front Connector

M12; A-, D- or X-coded
 (screwed and push-pull)

M12; A-, D- or X-coded
 (screwed and push-pull)

M12; A-, D- or X-coded
 (screwed and push-pull)

M12; A-, D- or X-coded
 (screwed and push-pull)

Dimensions

(W) 390 mm
 (D) 236 mm
 (H) 89 mm /
 (H) 67 mm (without fiber uplink option)

(W) 390 mm
 (D) 236 mm
 (H) 89 mm

(W) 390 mm
 (D) 236 mm
 (H) 89 mm

(W) 390 mm
 (D) 236 mm
 (H) 89 mm

PoE

10 × PoE+ PSE, max. 90 W
 (With external PSU max. 300 W)

22 × PoE+ PSE, max. 90 W
 (With external PSU max. 600 W)

Consumption

